

2027

PROFESSIONAL PRESSURE WASHER



T. 86-574-26289620
F. 86-574-26251988

NINGBO HIJET CLEANING EQUIPMENT CO.,LTD.
No.618 Dongming Road, Zhenhai Economic
Development Zone, Ningbo 315221 CHINA.

Contact information

Tel: +86-574-26289620
Fax: +86-574-26251988
Email: info@hijet.com.cn



COMPANY PROFILE

Established in 2001 with the production of pressure washer accessories, HMC Hijet Cleaning has evolved into a professional manufacturer specializing in the research, development, production, and sales of commercial cleaning equipments and core components. We operate in compliance with strict European and American standards, supported by advanced production processes and a cloud-integrated ERP management system that ensures both efficiency and consistent product quality.

HMC product portfolio includes pressure washers, high-pressure pumps, surface cleaners, hose reels, floor scrubbers, sweepers, and vacuum cleaners. They are widely used in property management, manufacturing, sanitation, construction, hospitals, schools, and many other industries. Our export network spans the United States, Canada, Australia, the United Kingdom, Japan, and many other countries.

PRODUCT R&D



QUALITY CONTROL



PRODUCT MANUFACTURING



PRODUCT CATALOG

PROFESSIONAL CLEANING
EQUIPMENT

CATALOG

PRESSURE WASHER

- Cold Water Gasoline Pressure Washer
- Cold Water Diesel Pressure Washer
- Cold Water Electric Pressure Washer
- Hot Water Pressure Washer
- Specialized Pressure Washer

PUMP & VALVE

- Axial Pump
- Triplex Plunger Pump

SURFACE CLEANER

- Surface Cleaner
- Water Broom
- Chassis Washer
- Long-Range Misting Cannon

TELESCOPIC POLE & SOLAR PANEL BRUSH

- Telescopic Pole
- Solar Panel Brush

HOSE REEL & HOSE

ACCESSORIES

- Spray Gun & Wand
- Nozzle & Fitting
- Foamer & Inlet Filter
- Sand Blaster
- Valve

SWEEPER

FLOOR SCRUBBER

VACUUM CLEANER

DEVELOPMENT HISTORY

• **2001**

Started production of pressure washer accessories, laying the foundation of HMC.



• **2010**

Launched cold water pressure washers, marking a move into complete cleaning equipment.



• **2018**

Adopted a cloud-integrated ERP system to enhance management efficiency.



• **2024**

Became a comprehensive commercial cleaning equipment company, exporting to the United States, Canada, Australia, the United Kingdom, Japan, and beyond.



2005

Expanded into high-pressure pumps, entering the core cleaning component field.



2015

Introduced hot water pressure washers and improved production processes.



2020

Expanded product line to scrubbers, sweepers, and vacuum cleaners.



Pressure Washer



Pump & Valve



Telescopic Pole & Solar Panel Brush




HOSE REEL & HOSE



Sweeper



PRESSURE WASHER

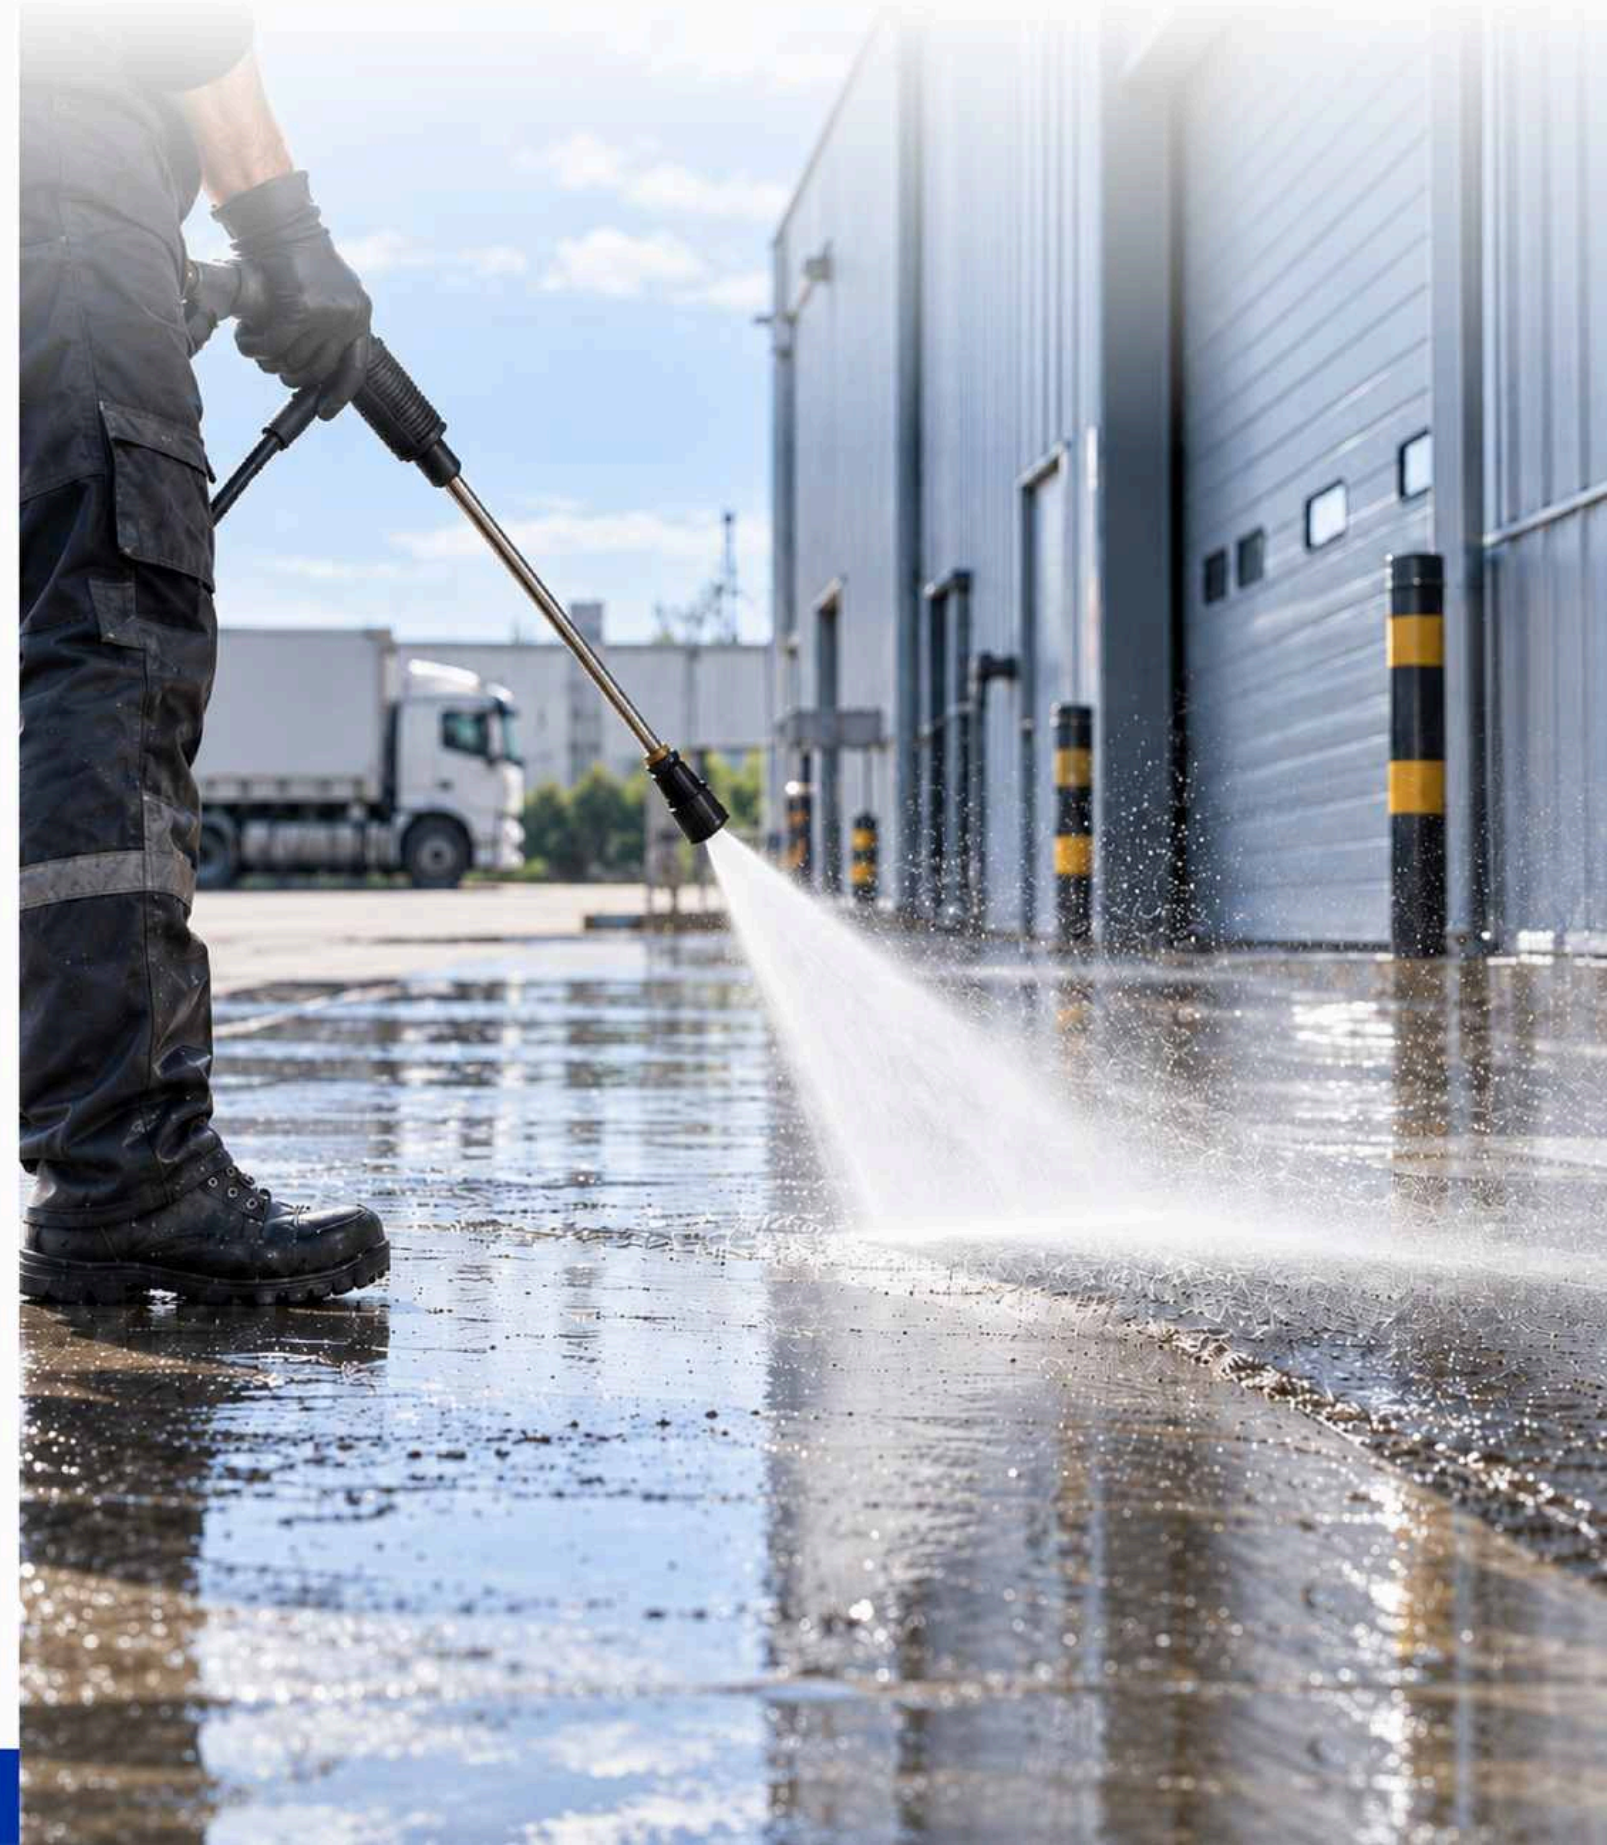

COLD WATER GASOLINE



R0610A-PL-WR

- ☐ **WOJET Axial Pump**
Maintenance free WOJET residential axial pump.
- ☐ **Reliable Gasoline Engine**
Performance proven OHV horizontal gasoline engine.
- ☐ **Compact Portable Frame**
Easy to carry portable powder-coated steel frame.
- ☐ **Shock-absorbing Feet**
4 separate rubber shock-absorbing feet.

ACCESSORIES ● STANDARD ○ OPTIONAL

- 
● PVC Hose
- 
● Spray Gun
- 
● Adjustable Nozzle
- 
○ Inlet Kit
- 
○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	R0610A-PL-WR
Rated Pressure	Bar / PSI	103 / 1500
Max. Pressure	Bar / PSI	118 / 1720
Rated Flow	LPM / GPM	6.0 / 1.6
Pump	—	WOJET Axial Pump
Thermal Valve	—	●
Discharge Valve	—	○
Engine	—	RATO
Displacement	ml	98
Oil Capacity	L	0.35
Fuel Capacity	L	1.8
Fuel Consumption	g·kW/h	≤450
Starting System	—	Recoil Start

COLD WATER GASOLINE



R0614A-VL-WZ

- ☐ **Compact Durable Frame**
Compact and durable powder-coated metal frame.
- ☐ **Smooth Mobility**
10" flat free PVC wheels for easy mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL

- 
● Standard
- 
● Standard
- 
● Standard
- 
○ Optional
- 
○ Optional

SPECIFICATIONS

PERFORMANCE	UNIT	R0614A-VL-WZ	R0921A-VL-WZ
Rated Pressure	Bar / PSI	137 / 2000	210 / 3000
Max. Pressure	Bar / PSI	157 / 2300	240 / 3450
Rated Flow	LPM / GPM	5.7 / 1.5	9.5 / 2.5
Pump	—	WOJET Axial Pump	
Thermal Valve	—	●	●
Discharge Valve	—	○	○
Engine	—	ZONGSHEN	ZONGSHEN
Displacement	ml	141	196
Oil Capacity	L	0.55	0.6
Fuel Capacity	L	0.8	1.0
Fuel Consumption	g·kW/h	≤374	≤374
Starting System	—	Recoil Start	

GASOLINE HIGH PRESSURE WASHER

- Frame with Soap Tank**
Compact and durable powder-coated metal frame with soap tank.
- Smooth Mobility**
10" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.



R1021A-LL-WR

ACCESSORIES

● STANDARD ○ OPTIONAL



PVC Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	R1021A-LL-WR	R1023A-LL-WR
Rated Pressure	Bar / PSI	213 / 3100	227 / 3300
Max. Pressure	Bar / PSI	245 / 3565	261 / 3795
Rated Flow	LPM / GPM	9.5 / 2.5	9.5 / 2.5
Pump	—	WOJET Axial Pump	WOJET Axial Pump
Thermal Valve	—	●	●
Discharge Valve	—	○	○
Engine	—	RATO	RATO
Displacement	ml	212	223
Oil Capacity	L	0.55	0.6
Fuel Capacity	L	3.9	3.6
Fuel Consumption	g/kW/h	≤375	≤374
Starting System	—	Recoil Start	Recoil Start

GASOLINE HIGH PRESSURE WASHER

- Lift and Pull Frame**
Space saving powder coated lift and pull metal frame.
- Smooth Mobility**
10" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.



R1021T-JL-WR

ACCESSORIES

● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	R1021T-JL-WR	R1021T-JL-WH
Rated Pressure	Bar / PSI	210 / 3000	210 / 3000
Max. Pressure	Bar / PSI	238 / 3450	238 / 3450
Rated Flow	LPM / GPM	9.5 / 2.5	9.5 / 2.5
Pump	—	WOJET Triplex Pump	WOJET Triplex Pump
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	212	196
Oil Capacity	L	0.55	0.6
Fuel Capacity	L	3.9	3.6
Fuel Consumption	g·kW/h	≤375	≤374
Starting System	—	Recoil Start	Recoil Start

COLD WATER GASOLINE



R0918A-LL-WR

- ☐ **Compact Durable Frame**
Compact and durable powder-coated metal frame.
- ☐ **Smooth Mobility**
10" flat free PVC wheels for easy mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



PVC Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

SPECIFICATIONS

PERFORMANCE	UNIT	R0918A-LL-WR	R0921A-LL-WH
Rated Pressure	Bar / PSI	180 / 2600	210 / 3000
Max. Pressure	Bar / PSI	207 / 2990	245 / 3450
Rated Flow	LPM / GPM	9.1 / 2.4	9.5 / 2.5
Pump	—	WOJET Axial Pump	
Thermal Valve	—	●	●
Discharge Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	212	196
Oil Capacity	L	0.55	0.6
Fuel Capacity	L	3.9	3.6
Fuel Consumption	g·kW/h	≤375	≤374
Starting System	—	Recoil Start	

COLD WATER GASOLINE



R1021T-HL-WR

- ☐ **Trolley-style Frame**
Classic and durable powder-coated trolley-style metal frame.
- ☐ **Smooth Mobility**
10" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

SPECIFICATIONS

PERFORMANCE	UNIT	R1021T-HL-WR	R1021T-HL-WH
Rated Pressure	Bar / PSI	210 / 3000	210 / 3000
Max. Pressure	Bar / PSI	242 / 3450	242 / 3450
Rated Flow	LPM / GPM	9.5 / 2.5	9.5 / 2.5
Pump	—	WOJET Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	212	196
Oil Capacity	L	0.55	0.6
Fuel Capacity	L	3.9	3.6
Fuel Consumption	g·kW/h	≤375	≤374
Starting System	—	Recoil Start	

GASOLINE HIGH PRESSURE WASHER

- Lift and Pull Frame**
Space-saving powder coated lift-and-pull metal frame.
- Smooth Mobility**
10" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.



R1528TE-JL-WR

ACCESSORIES

● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	R1528TE-JL-WR	R1528TE-JL-AH
Rated Pressure	Bar / PSI	276 / 4000	276 / 4000
Max. Pressure	Bar / PSI	303 / 4400	303 / 4400
Rated Flow	LPM / GPM	15 / 4.0	15 / 4.0
Pump	—	WOJET Triplex Pump	WOJET Triplex Pump
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.8	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g·kW/h	≤374	≤370
Starting System	—	Electric Start	Electric Start

COLD WATER GASOLINE



R1528T-JL-WR

- ☐ **Lift and Pull Frame**
Space-saving powder coated lift-and-pull metal frame.
- ☐ **Smooth Mobility**
13" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

SPECIFICATIONS

PERFORMANCE	UNIT	R1528T-JL-WR	R1528T-JL-WH
Rated Pressure	Bar / PSI	276 / 4000	276 / 4000
Max. Pressure	Bar / PSI	303 / 4400	303 / 4400
Rated Flow	LPM / GPM	15 / 4.0	15 / 4.0
Pump	—	WOJET Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.8	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g·kW/h	≤374	≤374
Starting System	—	Recoil Start	

COLD WATER GASOLINE



R1528T-HL-WR

- ☐ **Trolley-style Frame**
Classic and durable powder-coated trolley-style metal frame.
- ☐ **Smooth Mobility**
10" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

SPECIFICATIONS

PERFORMANCE	UNIT	R1528T-HL-WR	R1528T-HL-WH
Rated Pressure	Bar / PSI	276 / 4000	276 / 4000
Max. Pressure	Bar / PSI	303 / 4400	303 / 4400
Rated Flow	LPM / GPM	15 / 4.0	15 / 4.0
Pump	—	WOJET Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.8	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g·kW/h	≤374	≤370
Starting System	—	Recoil Start	

COLD WATER GASOLINE



R1528TE-HL-WR

- ☐ **Trolley-style Frame**
Classic and durable powder coated trolley-style metal frame.
- ☐ **Smooth Mobility**
10" pneumatic rubber wheels with excellent shock absorption for smooth mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

COLD WATER GASOLINE



G2215TE-IL-AGR

- ☐ **Rollcage Frame**
Rollcage powder coated metal frame with dual shock absorbing design.
- ☐ **Stable Mobility**
10" flat free foam filled rubber tires for smooth and stable mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Professional Cleaning**
Ideal for pipeline jetting, floor cleaning and construction machinery maintenance.

ACCESSORIES

● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



Multi-angle QC Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

SPECIFICATIONS

PERFORMANCE	UNIT	R1528TE-HL-WR	R1528TE-HL-WH
Rated Pressure	Bar / PSI	276 / 4000	276 / 4000
Max. Pressure	Bar / PSI	303 / 4400	300 / 4300
Rated Flow	LPM / GPM	15 / 4.0	15 / 4.0
Pump	—	WOJET Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.8	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g·kW/h	≤374	≤370
Starting System	—	Electric Start	

ACCESSORIES

● STANDARD ○ OPTIONAL



● Rubber Hose



● Spray Gun



● Multi-angle QC Nozzle



○ Inlet Kit



○ Sewer Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	G2215TE-IL-AGR	G2215TE-IL-AGH
Rated Pressure	Bar / PSI	152 / 2200	152 / 2200
Max. Pressure	Bar / PSI	175 / 2530	175 / 2530
Rated Flow	LPM / GPM	22 / 5.8	22 / 5.8
Pump	—	AR Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.8	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g·kW/h	≤374	≤370
Starting System	—	Electric Start	

COLD WATER GASOLINE PRESSURE WASHER

- Rollcage Frame**
Rollcage powder coated metal frame with dual shock absorbing design.
- Stable Mobility**
13" flat free foam filled rubber tires for smooth and stable mobility.
- Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- Professional Applications**
Ideal for rust removal, workshop and construction machinery cleaning
- 
- G3025TE-IL-AGR

ACCESSORIES

● STANDARD ○ OPTIONAL



Rubber Hose

● Standard

All models



Spray Gun

● Standard

G3025TE-IL-AGR



Spray Gun

● Standard

G1550TE-IL-AGR



Multi-angle QC Nozzle

● Standard

G3025TE-IL-AGR



Inlet Kit

○ Optional

All models



Sewer Nozzle

○ Optional

G3025TE-IL-AGR



Rotary Nozzle

○ Optional

G2135TE-IL-AGR



Rotary Nozzle

○ Optional

G1550TE-IL-AGR



SPECIFICATIONS

PERFORMANCE	UNIT	G3025TE IL-AGR	G3025TE IL-AGH	G4120TE IL-AGR	G4120TE IL-AGH	G2135TE IL-AGR	G2135TE IL-AGH	G1550TE IL-AGR	G1550TE IL-AGH
Rated Pressure	Bar / PSI	248 / 3600	248 / 3600	200 / 2900	200 / 2900	350 / 5075	350 / 5075	500 / 7250	500 / 7250
Max. Pressure	Bar / PSI	273 / 3900	273 / 3900	230 / 3300	230 / 3300	380 / 5510	380 / 5510	550 / 7975	550 / 7975
Rated Flow	LPM / GPM	30 / 8.0	30 / 8.0	41 / 10.8	41 / 10.8	21 / 5.5	21 / 5.5	15 / 4.0	15 / 4.0
Pump	—	AR Triplex Pump							
Thermal Valve	—	●	●	●	●	○	○	○	○
Safety Valve	—	○	○	○	○	●	●	●	●
Engine	—	RATO	HONDA	RATO	HONDA	RATO	HONDA	RATO	HONDA
Displacement	ml	740	688	740	688	740	688	740	688
Oil Capacity	L	1.6	1.9	1.6	1.9	1.6	1.9	1.6	1.9
Fuel Capacity	L	15	15	15	15	15	15	15	15
Fuel Consumption	g·kW/h	≤370	≤370	≤370	≤370	≤374	≤370	≤374	≤370
Starting System	—	Electric Start							

COLD WATER GASOLINE



P1824T-HS-AGR

- **Stainless Steel Frame**
Classic trolley-style 304 stainless steel frame.
- **Stable Mobility**
13" flat free foam filled rubber tires for smooth and stable mobility.
- **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES

● STANDARD ○ OPTIONAL



● Rubber Hose



● Spray Gun



● Multi-angle QC Nozzle



○ Inlet Kit



○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	P1824T-HS-AGR	P1824T-HS-AGH
Rated Pressure	Bar / PSI	248 / 3600	248 / 3600
Max. Pressure	Bar / PSI	280 / 4200	280 / 4200
Rated Flow	LPM / GPM	18.0 / 4.8	18.0 / 4.8
Pump	—	AR Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.1	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g-kW/h	≤374	≤370
Starting System	—	Recoil Start	

COLD WATER GASOLINE



P1824TE-IS-AGR

- **Stainless Steel Rollcage**
Rollcage 304 stainless steel frame with dual shock absorbing design.
- **Stable Mobility**
13" flat free foam filled rubber tires for smooth and stable mobility.
- **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- **Heavy Duty Applications**
Widely applicable for rust removal, workshop and construction machinery cleaning.

ACCESSORIES

● STANDARD ○ OPTIONAL



● Non-marking Rubber Hose



● Spray Gun



○ Inlet Kit



○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	P1824TE-IS-AGR	P1825TE-IS-AGH
Rated Pressure	Bar / PSI	250 / 3600	250 / 3600
Max. Pressure	Bar / PSI	280 / 4200	280 / 4200
Rated Flow	LPM / GPM	18 / 4.8	18 / 4.8
Pump	—	AR Triplex Pump	
Thermal Valve	—	●	●
Safety Valve	—	○	○
Engine	—	RATO	HONDA
Displacement	ml	420	389
Oil Capacity	L	1.8	1.1
Fuel Capacity	L	6.5	6.5
Fuel Consumption	g-kW/h	≤374	≤370
Starting System	—	Electric Start	

COLD WATER DIESEL



D1021TE-JL-WK

- ☐ **Lift and Pull Frame**
Space-saving powder coated lift-and-pull metal frame.
- ☐ **Pneumatic Rubber Wheels**
13" pneumatic rubber wheels with excellent shock absorption.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, sandblasters and professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



● Rubber Hose



● Spray Gun



● Multi-angle QC Nozzle



○ Inlet Kit



○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	D1021TE-JL-WK
Rated Pressure	Bar / PSI	207 / 3000
Max. Pressure	Bar / PSI	275 / 3960
Rated Flow	LPM / GPM	9.5 / 2.5
Pump	—	WOJET Triplex Pump
Thermal Valve	—	●
Safety Valve	—	○
Engine	—	KOOP
Displacement	ml	247
Oil Capacity	L	0.75
Fuel Capacity	L	2.5
Fuel Consumption	g-kW/h	≤296
Starting System	—	Electric Start

COLD WATER DIESEL



D1525TE-IL-WK

- ☐ **Rollcage Frame**
Rollcage powder coated metal frame with dual shock absorbing design.
- ☐ **Stable Mobility**
10" flat free foam filled rubber tires for smooth and stable mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, sewer nozzles and professional accessories.
- ☐ **Professional Cleaning**
Ideal for pipeline jetting, floor cleaning and construction machinery maintenance.

ACCESSORIES ● STANDARD ○ OPTIONAL



● Rubber Hose



● Spray Gun



● Multi-angle QC Nozzle



○ Inlet Kit



○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	D1525TE-IL-WK
Rated Pressure	Bar / PSI	250 / 3600
Max. Pressure	Bar / PSI	275 / 3960
Rated Flow	LPM / GPM	15 / 4
Pump	—	WOJET Triplex Pump
Thermal Valve	—	●
Safety Valve	—	○
Engine	—	KOOP
Displacement	ml	456
Oil Capacity	L	1.65
Fuel Capacity	L	5.5
Fuel Consumption	g-kW/h	≤296
Starting System	—	Electric Start

COLD WATER ELECTRIC



B0715AT-ML-W1

- ☐ **Lightweight Housing**
Lightweight semi enclosed plastic housing.
- ☐ **Flexible Installation**
Flexible to use with trolley or wall-mount rack.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foam cannons and professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



SPECIFICATIONS

PERFORMANCE	UNIT	B0715AT-ML-W1	B0812AT-ML-W1
Rated Pressure	Bar / PSI	150 / 2175	120/1750
Max. Pressure	Bar / PSI	172/ 2500	138/2000
Rated Flow	LPM / GPM	7.0 / 1.8	8.3 / 2.2
Pump	—	WOJET Axial Pump	
Thermal Valve	—	○	○
TSS	—	●	●
Motor Type	—	Single Phase AC Induction Motor	
Power	kW	2.2	2.2
Voltage	V	220-230	220-230
Frequency	Hz	50	50
Speed	RPM	2880	2880

COLD WATER ELECTRIC



B0815TT-LL-W1

- ☐ **Durable Plastic Housing**
Semi enclosed plastic housing with powder coated metal base.
- ☐ **Easy Mobility**
Flat-free 10" PVC wheels for easy mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



SPECIFICATIONS

PERFORMANCE	UNIT	B0815TT-LL-W1	B1210TT-LL-W1	B1316TT-LL-W3
Rated Pressure	Bar / PSI	150 / 2175	100 / 1450	160 / 2320
Max. Pressure	Bar / PSI	172 / 2505	115 / 1660	184 / 2660
Rated Flow	LPM / GPM	8.0 / 2.2	12 / 3.2	13 / 3.4
Pump	—	WOJET Triplex Pump		
Thermal Valve	—	○	○	○
TSS	—	●	●	●
Motor Type	—	Single Phase AC Induction Motor	Single Phase AC Induction Motor	Three Phase AC Induction Motor
Power	kW	2.2	2.2	4.0
Voltage	V	220-230	220-230	380-400
Frequency	Hz	50	50	50
Speed	RPM	2880	2880	1440

COLD WATER ELECTRIC



B1210TD-DL-W3

- ☐ **Enclosed Plastic Housing**
Complete enclosed plastic housing with powder coated metal base.
- ☐ **Easy Mobility**
Flat-free 10" PVC wheels for easy mobility.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



● Rubber Hose ● Spray Gun ● Multi-angle QC Nozzle ○ Inlet Kit ○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	B1210TD-DL-W3	B1316TD-DL-W3
Rated Pressure	Bar / PSI	100 / 1450	160 / 2320
Max. Pressure	Bar / PSI	115 / 1660	184 / 2660
Rated Flow	LPM / GPM	12 / 3.2	13 / 3.4
Pump	—	WOJET Triplex Pump	
Thermal Valve	—	○	○
DSS	—	●	●
Motor Type	—	Three Phase AC Induction Motor	
Power	kW	2.5	4.0
Voltage	V	220-230	380-400
Frequency	Hz	50	50
Speed	RPM	1440	1440

COLD WATER ELECTRIC



B1420TD-KL-W3

- ☐ **Durable Metal Housing**
Semi enclosed metal housing with powder-coated metal base.
- ☐ **Pneumatic Rubber Wheels**
10" pneumatic rubber wheels with excellent shock absorption.
- ☐ **Accessory Compatibility**
Compatible with surface cleaners, foamers and various professional accessories.
- ☐ **Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.

ACCESSORIES ● STANDARD ○ OPTIONAL



● Rubber Hose ● Spray Gun ● Multi-angle QC Nozzle ○ Inlet Kit ○ Rotary Nozzle

SPECIFICATIONS

PERFORMANCE	UNIT	B1420TD-KL-W3	B1525TD-KL-W3
Rated Pressure	Bar / PSI	200 / 2900	250 / 3600
Max. Pressure	Bar / PSI	230 / 3330	288 / 4140
Rated Flow	LPM / GPM	14 / 3.7	15 / 4
Pump	—	WOJET Triplex Pump	
Thermal Valve	—	○	○
DSS	—	●	●
Motor Type	—	Three Phase AC Induction Motor	
Power	kW	5.5	7.5
Voltage	V	380-400	380-400
Frequency	Hz	50	50
Speed	RPM	1440	1440

COLD WATER ELECTRIC PRESSURE WASHER

- Reinforced Rollcage**
Reinforced rollcage powder-coated steel frame.
- Stable Mobility**
Flat free 10" foam filled rubber wheels
- Accessory Compatibility**
Compatible with sandblasting kits, rotary nozzles and professional accessories.
- Professional Applications**
Widely applicable for rust removal, workshop and construction machinery cleaning.



E1828TD-NB-W3

ACCESSORIES

● STANDARD ○ OPTIONAL

Rubber Hose

● Standard

All models

Spray Gun

● Standard

E1828TD-NB-W3

Spray Gun

● Standard

E2250TD-NB-W3

Multi-angle QC Nozzle

● Standard

E1828TD-NB-W3

Inlet Kit

○ Optional

All models

Rotary Nozzle

○ Optional

E1828TD-NB-W3

Rotary Nozzle

○ Optional

E2250TD-NB-W3

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	E1828TD-NB-W3	E2135TD-NB-W3	E2250TD-NB-W3
Rated Pressure	Bar / PSI	280 / 4060	350 / 5075	500 / 7250
Max. Pressure	Bar / PSI	308 / 4460	385 / 5580	550 / 7975
Rated Flow	LPM / GPM	18 / 4.8	21 / 5.5	22 / 5.8
Pump	—	AR Triplex Pump		
Thermal Valve	—	○	○	○
DSS	—	●	●	●
Motor Type	—	Three Phase AC Induction Motor		
Power	kW	9.2	15	22
Voltage	V	380-400	380-400	380-400
Frequency	Hz	50	50	50
Speed	RPM	1440	1440	1440

HOT WATER PRESSURE WASHER

ACCESSORIES

● STANDARD ○ OPTIONAL



HG1528TE-IL-WR



HD1525TE-IL-WK



HB1525TD-KL-W3

MODEL	UNIT	HG1528TE-IL-WR	HD1525TE-IL-WK	HB1525TD-KL-W3
PERFORMANCE DATA				
Rated Pressure	Bar / PSI	276 / 4000	250 / 3600	250 / 3600
Max. Pressure	Bar / PSI	305 / 4300	275 / 3960	280 / 3930
Rated Flow	LPM / GPM	15 / 4.0	15 / 4.0	15 / 4.0
Max. Temperature	°C / °F	90 / 195	90 / 195	90 / 195
Pump	—	WOJET Triplex Pump	WOJET Triplex Pump	WOJET Triplex Pump
Thermal Valve	—	●	●	—
Safety Valve	—	○	○	○
DSS	—	—	—	●
Engine	—	RATO	KOOP	—
Motor Type	—	—	—	Three Phase AC Induction Motor
Displacement	ml	420	456	—
Power	kW	—	—	7.5
Voltage	V	—	—	380–400
Frequency	Hz	—	—	50
Speed	RPM	—	—	1440
Oil Capacity	L	1.8	1.65	—
Engine Fuel Tank Capacity	L	6.5	6.5	—
Fuel Consumption	g·kW/h	≤374	≤296	—
Starting System	—	Electric Start	Electric Start	—
Boiler Fuel	—	Diesel	Diesel	Diesel
Boiler Fuel Tank Capacity	L	30	30	30

HOT WATER ELECTRIC PRESSURE WASHER

- Enclosed Plastic Housing**
Fully enclosed plastic housing with powder coated metal base.
- Easy Mobility**
12" flat free PVC wheels for easy mobility.
- Accessory Compatibility**
Compatible with surface cleaners, sewer nozzles and professional accessories.
- Versatile Applications**
Ideal for cleaning driveways, patios, exterior walls, vehicles and outdoor furniture.



HB1420TD-ZL-W3

ACCESSORIES

● STANDARD ○ OPTIONAL



Rubber Hose
● Standard



Spray Gun
● Standard



1/4" MNPT Nozzle
● Standard



Inlet Kit
○ Optional



Rotary Nozzle
○ Optional

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	HB1420TD-ZL-W3
Rated Pressure	Bar / PSI	200 / 2900
Max. Pressure	Bar / PSI	230 / 3330
Rated Flow	LPM / GPM	14 / 3.7
Max. Temperature	°C / °F	90 / 195
Pump	—	WOJET Triplex Pump
Safety Valve	—	○
DSS	—	●
Motor Type	—	Three Phase AC Induction Motor
Power	kW	5.5
Voltage	V	380–400
Frequency	Hz	50
Speed	RPM	1440
Boiler Fuel	—	Diesel
Fuel Tank Capacity	L	20

SPECIAL APPLICATION PRESSURE WASHER

ACCESSORIES

● STANDARD ○ OPTIONAL



● Rubber Hose



● Spray Gun



● Multi-angle QC Nozzle



○ Inlet Kit
MR1021TE-TBT-WR



○ Rotary Nozzle



MR1021TE-TBT-WR



MR1528TE-TBT-WR



MB1420TD-TBT-W3

MODEL	UNIT	MR1021TE-TBT-WR	MR1528TE-TBT-WR	MB1420TD-TBT-W3
PERFORMANCE DATA				
Rated Pressure	Bar / PSI	207 / 3000	276 / 4000	200 / 2900
Max. Pressure	Bar / PSI	238 / 3450	303 / 4400	230 / 3330
Rated Flow	LPM / GPM	9.5 / 2.5	15 / 4.0	14 / 3.7
Pump	—	WOJET Triplex Pump	WOJET Triplex Pump	WOJET Triplex Pump
Thermal Valve	—	●	○	○
Safety Valve	—	○	○	—
DSS	—	—	—	○
Engine	—	RATO	RATO	—
Motor Type	—	—	—	Three Phase AC Induction Motor
Displacement	ml	212	420	—
Power	kW	—	—	5.5
Voltage	V	—	—	380–400
Frequency	Hz	—	—	50
Speed	RPM	—	—	1440
Oil Capacity	L	0.6	1.1	—
Fuel Capacity	L	3.6	6.5	—
Fuel Consumption	g·kW/h	≤374	≤374	—
Starting System	—	Electric Start	Electric Start	—
Water Tank Capacity	L	300	300	300

PRESSURE WASHER

APPLICATIONS



Industrial Facilities

Cleaning workshop floors, loading bays and outdoor work areas.



Vehicle Cleaning

Removing mud and road dirt from vehicle exteriors.



Outdoor Surfaces

Cleaning walls, paved areas and outdoor hard surfaces.

PUMP & VALVE



02 PUMP & VALVE

MOTOR-DRIVEN PUMPS



Specification	AQ1335	AQ1343	AQ1333	AQ1341	AQ1342	AQ1345	WZD1525	WXS2410	WXS1828	BZD1515
Flow (LPM / GPM)	22 / 5.8	21 / 5.5	18 / 4.8	21 / 5.5	30 / 8.0	41 / 10.8	15 / 4	24 / 6.3	18 / 4.8	15 / 4
Pressure (Bar / PSI)	500 / 7250	350 / 5075	276 / 4000	250 / 3600	250 / 3600	200 / 2900	250 / 3600	100 / 1450	280 / 4200	150 / 2175
Motor (kW)	22	15	11	11	15	16	7.5	4.7	7.5	4
Speed (RPM)	1450	1450	1450	1450	1450	1450	1440	1440	1440	1440
Shaft	Solid 24mm	Solid 24mm	Solid 24mm	Solid 24mm	Solid 24mm	Solid 24mm	Hollow 28mm	Solid 24mm	Solid 24mm	Hollow 28mm
Inlet	G1/2" F	G1/2" F	G1/2" F	G1/2" F	G3/4" F	G3/4" F	G1/2" F	G1/2" F	G1/2" F	G1/2" F
Outlet	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" F
MFG Model	RGX 22.50	SRG 21.35	RG 18.28	RG 21.25	RG 30.25	RGL 41.20	—	—	—	—

02 PUMP & VALVE

ENGINE-DRIVEN PUMPS



Specification	AQ1327	AQ1313	BZG2730	WZG4040	WTGK4040	BTGK2730	ZYG2530	ZYG2632	ZBC2426	ZBG2426	ZBG2630	ZAC1320	ZAG1615
Flow (LPM / GPM)	11.4 / 3.0	15.0 / 4.0	10.2 / 2.7	15 / 4	15 / 4	10.2 / 2.7	9.5 / 2.5	9.8 / 2.6	9.1 / 2.4	9.1 / 2.4	9.8 / 2.6	4.9 / 1.3	6.1 / 1.6
Pressure (Bar / PSI)	180 / 2700	276 / 4000	210 / 3000	276 / 4000	276 / 4000	210 / 3000	210 / 3000	220 / 3200	180 / 2600	180 / 2600	210 / 3000	138 / 2000	105 / 1500
Engine (HP)	6	15	7	15	15	7	7	7	6.5	5.5	7	4	3
Speed (RPM)	3400	3400	3400	3400	3400	3400	3400	3400	3400	3400	3400	3400	3400
Shaft	Hollow 3/4"	Hollow 1"	Hollow 3/4"	Hollow 1"	Hollow 1"	Hollow 3/4"	Hollow 3/4"	Hollow 3/4"	Hollow 7/8"	Hollow 3/4"	Hollow 3/4"	Hollow 7/8"	Hollow 16mm
Inlet	G1/2" F	G1/2" F	G1/2" F	G1/2" F	G3/8" F	G3/8" F	NH3/4" F	NH3/4" F	NH3/4" M	NH3/4" M	NH3/4" F	NH3/4" M	NH3/4" M
Outlet	G3/8" F	G3/8" F	G3/8" F	G3/8" F	G3/8" M	G3/8" M	M22 M	M22 M	M22 M	M22 M	M22 M	M22 M	M22 M
MFG Model	RRV 3G27	RRV 4G40	—	—	—	—	—	—	—	—	—	—	—

02 PUMP & VALVE

REPLACEMENT PARTS

Pump Series	Water Seal Kit	Oil Seal Kit	Valve Kit	Unloader / Piston Kit
ZAG	BA9031	BA9033	BA9041	BA9040
ZAC	BA9022	BA9021	BA9007 + BA9024	BA9018
ZBG	BA9022	BA9021	BA9007 + BA9024	BA9019
ZBC	BA9031	BA9033	BA9041	BA9040
ZYG	BA9022	BA9039	BA9014	BA9018
BTGK / WTGK	BA9034	BA9000	BA9037	BA9018
BZG / WZG	BA9034	BA9000	BA9004	BA9035
BZD / WZD	BA9036	BA9000	BA9004	BA9038
WXS	BA9043	BA9042	BA9044	BA9045
RRV	BQ9318	BQ9337	BQ9306	BQ9330
RG	BQ9317	BQ9344	BQ9314	BQ9328
SRG	BQ9322	BQ9344	BQ9302	BQ9328
RGX	BQ9447	BQ9344	BQ9449	BQ9448

02 PUMP & VALVE

GAUGES & THERMAL VALVES



Specification	FT8031G	FT8022	FT8021	FT7003	FT7002	FT7001
Connection	G3/8" M	1/4" FNPT	1/4" FNPT	1/2" MNPT	3/8" MNPT	1/4" MNPT
Port / Body Material	SS	Brass	Brass	Brass	Brass	Brass
Housing Material	SS	SS	SS	—	—	—
Dial Ø (mm / inch)	100 / 4	50 / 2	50 / 2	—	—	—
Max Flow (LPM / GPM)	—	—	—	40 / 10.5	40 / 10.5	40 / 10.5
Max Pressure (Bar / PSI)	350 / 5075	276 / 4000	276 / 4000	20 / 300	20 / 300	20 / 300
Open Temp (°C / °F)	—	—	—	60 / 140	60 / 140	60 / 140
Weight (kg)	0.76	0.18	0.18	.06	.05	.02
Box QTY	1	10	10	10	10	10

UNLOADER VALVES



Specification	FT4028GF	FT4028GM	FT2128G6	FT2125G	FT2125G16
Flow (LPM / GPM)	40 / 10.5	40 / 10.5	21 / 5.6	21 / 5.6	21 / 5.6
Pressure (Bar / PSI)	280 / 4060	280 / 4060	280 / 4060	250 / 3600	250 / 3600
Inlet	G3/8" F	G3/8" M	G1/2" F	G1/2" F	G1/2" F
Outlet	G3/8" F	G3/8" F	G3/8" M	G3/8" M	G3/8" M
Bypass	G3/8" F	G3/8" F	—	—	—
Suitable for	—	—	RR	WZ / BZ	WT / BT
Repair Kit	FT9003	FT9003	FT9001	FT9001	FT9001
MFG Model	—	—	—	—	—

02 PUMP & VALVE

UNLOADER VALVES



BQ1013



BQ1007



BQ1004



BQ1009



BQ1014

Specification	BQ1013	BQ1007	BQ1004	BQ1009	BQ1014
Flow (LPM / GPM)	30 / 8.0	21 / 5.6	40 / 10.5	100 / 26.4	80 / 21.0
Pressure (Bar / PSI)	220 / 3200	250 / 3600	350 / 5075	550 / 7980	800 / 11600
Inlet	R1/2" M	G1/2" F	G3/8" F	G1/2" F	G1/2" F
Outlet	G3/8" M	G3/8" F	G3/8" F	G1/2" F	G1/2" F
Bypass	G3/8" F	—	G3/8" F	G1/2" F	G1/2" F
Suitable for	—	RRV	RG	SRG	RTP
Repair Kit	BQ9004	BQ9005	BQ9006	BQ9003	BQ9007
MFG Model	VR 56	VRZ ID	VHP 39	VHP 60	VHP 80

SAFETY VALVES



FT7022



FT7023



BQ1015



BQ1016



BQ1017

Specification	FT7022	FT7023	BQ1015	BQ1016	BQ1017
Flow (LPM / GPM)	25 / 6.6	100 / 26.4	60 / 16	250 / 66	450 / 120
Pressure (Bar / PSI)	400 / 5800	560 / 8100	900 / 13050	200 / 2900	220 / 3200
Inlet	G3/8" F × 2	G1/2" F	G3/8" F	G3/4" F	G1" F
Outlet	G3/8" F	G1/2" F	G1/2" F	G3/4" F	G1" F
Max Temp (°C / °F)	90 / 194	90 / 194	90 / 194	90 / 194	90 / 194
Repair Kit	FT9005	BQ9006	BQ9009	BQ9010	BQ9011
MFG Model	—	SVL 50	SVL 80	SVL 20/250	SVL 450

SURFACE CLEANER



03

SURFACE CLEANER



AF14PB-A2

AF16PB-CA2

Specification	AF14PB-A2	AF16PB-CA2
Cleaning Diameter	14"	16"
Min Pressure	103 Bar / 1500 PSI	103 Bar / 1500 PSI
Max Pressure	235 Bar / 3400 PSI	235 Bar / 3400 PSI
Max Flow	11.4 LPM / 3.0 GPM	11.4 LPM / 3.0 GPM
Max Temperature	60°C / 140°F	60°C / 140°F
Inlet	1/4" QC Plug	1/4" QC Plug
Nozzle	15015 × 2	15015 × 2
Weight	2.1 kg	3.8 kg

03

SURFACE CLEANER



AF12PL-B2



AF14SS-CB2

Specification	AF12PL-B2	AF14SS-CB2
Cleaning Diameter	12"	14"
Min Pressure	137 Bar / 2000 PSI	137 Bar / 2000 PSI
Max Pressure	310 Bar / 4500 PSI	3100 Bar / 4500 PSI*
Max Flow	15 LPM / 4.0 GPM	15 LPM / 4.0 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	1/4" QC Plug	1/4" QC Plug
Nozzle	25020 × 2	15020 × 2
Weight	2.1 kg	4.8 kg

* AF14SS-CB2: PDF states 3100 Bar / 4500 PSI; verify pressure value.

03

SURFACE CLEANER



AF18SS-CC2



AF20SS-HCC2

Specification	AF18SS-CC2	AF20SS-HCC2
Cleaning Diameter	18"	20"
Min Pressure	137 Bar / 2000 PSI	137 Bar / 2000 PSI
Max Pressure	310 Bar / 4500 PSI	310 Bar / 4500 PSI
Max Flow	15 LPM / 4.0 GPM	15 LPM / 4.0 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	1/4" QC Plug	3/8" QC Plug
Nozzle	25020 × 2	25020 × 2
Weight	6.7 kg	14 kg

03

SURFACE CLEANER



AF22SS-HCD3



AF24SS-HCE3

Specification	AF22SS-HCD3	AF24SS-HCE3
Cleaning Diameter	22"	24"
Min Pressure	137 Bar / 2000 PSI	137 Bar / 2000 PSI
Max Pressure	310 Bar / 4500 PSI	350 Bar / 5075 PSI
Max Flow	23 LPM / 6.0 GPM	30 LPM / 8.0 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	3/8" QC Plug	3/8" QC Plug
Nozzle	25020 × 3	25020 × 3
Weight	15 kg	18 kg

03

SURFACE CLEANER



AF19PL-HC2



AF19PL-HCC2

Specification	AF19PL-HC2	AF19PL-HCC2
Cleaning Diameter	19"	19"
Min Pressure	137 Bar / 2000 PSI	137 Bar / 2000 PSI
Max Pressure	310 Bar / 4500 PSI	310 Bar / 4500 PSI
Max Flow	15 LPM / 4.0 GPM	15 LPM / 4.0 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	3/8" QC Plug	3/8" QC Plug
Nozzle	25020 × 2	25020 × 2
Weight	15 kg	15 kg

03

SURFACE CLEANER



AF36SS-HCE4



AF9063

Specification	AF36SS-HCE4	AF9063
Cleaning Diameter	36"	—
Min Pressure	137 Bar / 2000 PSI	—
Max Pressure	310 Bar / 4500 PSI	310 Bar / 4500 PSI
Max Flow	30 LPM / 8.0 GPM	26.5 LPM / 7.0 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	3/8" QC Plug	3/8" QC Plug
Nozzle	25020 × 4	65010 × 7
Weight	28 kg	6.5 kg
Material	—	Aluminum
Box Qty	—	1

03

SURFACE CLEANER



AF9060

AF9061

Specification	AF9060	AF9061
Max Pressure	310 Bar / 4500 PSI	310 Bar / 4500 PSI
Max Flow	14.8 LPM / 3.9 GPM	19.7 LPM / 5.2 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	1/4" QC Plug	1/4" QC Plug
Nozzle	65013 × 3	65013 × 4
Weight	2.0 kg	2.8 kg
Material	Aluminum	Aluminum
Box Qty	10	10

03

SURFACE CLEANER



AF9064

AF9065

Specification	AF9064	AF9065
Max Pressure	275 Bar / 4000 PSI	275 Bar / 4000 PSI
Max Flow	15 LPM / 4.0 GPM	15 LPM / 4.0 GPM
Max Temperature	150°C / 300°F	150°C / 300°F
Inlet	3/8" QC Plug	M22M
Nozzle	25020 × 2	25020 × 2
Weight	18 kg	12 kg
Material	Stainless Steel	Steel
Box Qty	1	1

TELESCOPIC POLE & SOLAR PANELBRUSH



SOLAR PANELBRUSH



AL40CL-4RB



AL40CL-4RB2

SPECIFICATIONS

PERFORMANCE	UNIT	AL40CL-4RB	AL40CL-4RB2
Pole Material	—	Carbon Fiber	Carbon Fiber
Extension Length	m	4-12	4-12
Brush Diameter	cm	30	30 × 2
Motor	—	DC 24 V Brushless	DC 24 V Brushless
Rotating Speed	RPM	350	350
AC Power Supply	V	100-240	100-240
Battery Supply	V	24 V Lithium Battery	24 V Lithium Battery
Battery Life	h	4	4



AL18GA-4N



AL24GA-4N



DETAILS



SPECIFICATIONS

SPECIFICATION	AL18GA-4N	AL24GA-4N	AL33CB-6N	AL40CB-8N
Inlet	3/8" QC Plug	3/8" QC Plug	3/8" QC Plug	3/8" QC Plug
Sections	4	4	6	8
Material	Fibreglass & Aluminum	Fibreglass & Aluminum	Carbon Fiber	Carbon Fiber
Total Length (m / ft)	5.5 / 18	7.3 / 24	10.0 / 33	12.2 / 40
Max Flow (LPM / GPM)	26 / 7.0	26 / 7.0	26 / 7.0	26 / 7.0
Max Pressure (Bar / PSI)	276 / 4000	276 / 4000	276 / 4000	276 / 4000
Max Temp (°C / °F)	100 / 212	100 / 212	100 / 212	100 / 212
Weight (kg)	4.40	5.80	6.80	8.20
Box QTY	1	1	1	1

TELESCOPIC WATER-FED BRUSH

Aluminum pole · 7 sections



AL15AL-7FB



SPECIFICATIONS

PARAMETER	UNIT	AL15AL-7FB	AL20AL-7FB	AL26AL-7FB
Pole Material	—	Aluminum	Aluminum	Aluminum
Sections	—	7	7	7
Extension Size	ft / cm	15 / 457	20 / 609	26.24 / 800

HOSE REEL & HOSE



05 HOSE REEL & HOSE



AE01-50



AE01-100



AE02-100



AE02-200



AE03-100



AE04-300



AE06-32



AE07-50

Specification	AE01-50	AE01-100	AE02-100	AE02-200	AE03-100	AE04-300	AE06-32	AE07-50	AE03-150	AE07-65	AE07-100
Hose Capacity	3/8" × 50'	3/8" × 100'	3/8" × 100'	3/8" × 200'	3/8" × 100'	3/8" × 300"	3/8" × 10M	3/8" × 15M	3/8" × 150'	3/8" × 20M	3/8" × 30M
Max Pressure (Bar / PSI)	276 / 4000	276 / 4000	276 / 4000	276 / 4000	276 / 4000	350 / 5075	276 / 4000	276 / 4000	276 / 4000	276 / 4000	276 / 4000
Max Temperature (°C / °F)	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300	150 / 300
Inlet	3/8" FNPT	3/8" FNPT	3/8" MNPT	3/8" MNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT
Outlet	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" MNPT	3/8" FNPT	3/8" MNPT	3/8" MNPT
Weight (kg)	4.0	5.0	6.0	7.8	6.0	19.0	15	19	8.0	20	23
Dimensions (cm)	30 × 30 × 39	30 × 42 × 39	42 × 42 × 50	42 × 50 × 50	35 × 33 × 36	55 × 46 × 47	40 × 40 × 28	57 × 57 × 28	35 × 65 × 45	57 × 57 × 32	57 × 57 × 35
Unit / Pallet	60	45	24	24	36	16	32	32	20	28	24

05 HOSE REEL & HOSE



AN5425



AN5425L



AN1425



AN1425S



AN1425LSM



AN1632



AN1650GS



AN1650LS



AN2650GS



AN2650LS



AN3650

Specification	AN5425	AN5425L	AN1425	AN1425S	AN1425LSM	AN1632	AN1650GS	AN1650LS	AN2650GS	AN2650LS	AN3650
Connection	M22 F × M22 F	M22 F × M22 F	3/8" MNPT Solid & Swivel	3/8" MNPT Solid & Swivel	M22 F × M22 F	3/8" MNPT Solid & Swivel	3/8" MNPT Solid & Swivel	3/8" MNPT Solid & Swivel	3/8" MNPT Solid & Swivel	3/8" MNPT Solid & Swivel	3/8" MNPT Swivel
Hose Color	Black	Blue	Black	Black	Blue	Black	Grey	Blue	Black	Blue	Black
Sleeve Color	Black	Black	Black	Black	Black	Red	Black	Black	Black	Blue	Blue
Max Pressure (Bar / PSI)	235 / 3400	235 / 3400	276 / 4000	276 / 4000	276 / 4000	310 / 4500	310 / 4500	310 / 4500	413 / 6000	413 / 6000	689 / 10000
Max Temp (°C / °F)	60 / 140	60 / 140	100 / 212	100 / 212	100 / 212	100 / 212	120 / 250	120 / 250	120 / 250	120 / 250	120 / 250
Length (m / ft)	7.6 / 25	7.6 / 25	7.6 / 25	7.6 / 25	7.6 / 25	10 / 32	15.2 / 50	15.2 / 50	15.2 / 50	15.2 / 50	15.2 / 50
Weight (kg)	1.0	1.0	1.0	1.0	1.0	3.4	4.9	4.9	7.4	7.4	11.8
Box QTY	1	1	1	1	1	1	1	1	1	1	1

PRESSURE WASHER ACCESSORIES



06 PRESSURE WASHER ACCESSORIES

SPRAY GUNS



	AC7106	AC7103	AC7042	AC7015	AC7028SC	AC7215VPC
Specification	AC7106	AC7103	AC7042	AC7015	AC7028SC	AC7215VPC
Inlet	M22 M	M22 M	3/8" FNPT	3/8" FNPT	3/8" FNPT Swivel	3/8" QC Plug
Outlet	M22 F	M22 F	1/4" FNPT	1/4" FNPT	1/4" QC	1/4" QC Coupler
Wand (mm / inch)	—	—	—	—	—	915 / 36 Vented
Max Flow (LPM / GPM)	26 / 7	26 / 7	40 / 10.5	40 / 10.5	40 / 10.5	40 / 10.5
Max Pressure (Bar / PSI)	235 / 3400	310 / 4500	310 / 4500	350 / 5075	350 / 5075	350 / 5075
Max Temp (°C / °F)	60 / 140	100 / 212	100 / 212	150 / 300	150 / 300	150 / 300
Weight (kg)	.6	.8	.6	.7	.7	1.4
Box QTY	20	20	30	30	30	10

ROTARY NOZZLES



	AB70**	AB72**	AB73**	AB74**	AB75**
Specification	AB70**	AB72**	AB73**	AB74**	AB75**
Connection	G1/4" F	G1/4" F	G1/4" F	G1/4" F	G1/4" F
Material / Insert	Brass & Plastic	Plastic	Ceramic & Brass	Ceramic & Brass	Ceramic & Brass
Angle / Orifices	1	0°	0°	0°	0°
Max Flow (LPM / GPM)	19 / 5.0	40 / 10.5	40 / 10.5	40 / 10.5	40 / 10.5
Max Pressure (Bar / PSI)	220 / 3200	137 / 2000	206 / 3000	276 / 4000	350 / 5075
Max Temp (°C / °F)	60 / 140	150 / 300	150 / 300	150 / 300	150 / 300
Weight (kg)	.02	.13	.26	.37	.45
Box QTY	10	10	10	10	10

DRAIN CLEANING NOZZLES



	AB8250	AB8450	AB8650	AB8750
Specification	AB8250	AB8450	AB8650	AB8750
Connection	1/8" FNPT	1/4" FNPT	3/8" FNPT	3/8" FNPT
Material / Insert	SS	SS	SS	SS
Angle / Orifices	1 Front / 3 Side	1 Front / 3 Side	1 Front / 3 Side	3 Side
Max Flow (LPM / GPM)	19 / 5.0	19 / 5.0	19 / 5.0	19 / 5.0
Max Pressure (Bar / PSI)	310 / 4500	310 / 4500	310 / 4500	310 / 4500
Max Temp (°C / °F)	150 / 300	150 / 300	150 / 300	150 / 300
Weight (kg)	.01	.02	.04	.05
Box QTY	10	10	10	10

06 PRESSURE WASHER ACCESSORIES

VARIABLE NOZZLES



AB89296



AB89277C

Specification	AB89296	AB89277C
Connection	1/4" QC	1/4" QC
Material / Insert	SS & Aluminum	Brass & Plastic
Angle / Orifices	6	7
Max Flow (LPM / GPM)	9.5 / 2.5	9.5 / 2.5
Max Pressure (Bar / PSI)	227 / 3300	227 / 3300
Max Temp (°C / °F)	60 / 140	60 / 140
Weight (kg)	.05	.05
Box QTY	10	10

QUICK-CONNECT NOZZLES



AB00**7H



AB15**7H



AB25**7H



AB40**7H

Specification	AB00**7H	AB15**7H	AB25**7H	AB40**7H
Connection	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug
Material	SS & Plastic	SS & Plastic	SS & Plastic	SS & Plastic
Spray Angle	0°	15°	25°	40°
Max Flow (LPM / GPM)	56 / 15	56 / 15	56 / 15	56 / 15
Max Pressure (Bar / PSI)	310 / 4500	310 / 4500	310 / 4500	310 / 4500
Max Temp (°C / °F)	150 / 300	150 / 300	150 / 300	150 / 300
Weight (kg)	.02	.02	.02	.02
Box QTY	100	100	100	100

THREADED NOZZLES



AB00**0H



AB15**0H



AB25**0H



AB40**0H

Specification	AB00**0H	AB15**0H	AB25**0H	AB40**0H
Connection	1/4" MNPT	1/4" MNPT	1/4" MNPT	1/4" MNPT
Material	SS	SS	SS	SS
Spray Angle	0°	15°	25°	40°
Max Flow (LPM / GPM)	56 / 15	56 / 15	56 / 15	56 / 15
Max Pressure (Bar / PSI)	500 / 7250	500 / 7250	500 / 7250	500 / 7250
Max Temp (°C / °F)	150 / 300	150 / 300	150 / 300	150 / 300
Weight (kg)	.02	.02	.02	.02
Box QTY	100	100	100	100

06 PRESSURE WASHER ACCESSORIES



AK7063



AK7064



AK3061



AK1191



AK1171

Specification	AK7063	AK7064	AK3061	AK1191	AK1171
Connection	1/4" QC Plug	1/4" QC Plug	1/4" ID	3/8" MNPT × 3/8" MNPT	3/8" QC Plug × 3/8" QC Coupler
Material	Brass & Plastic	Brass & Plastic	Plastic	Brass	Brass
Nozzle Orifice (mm)	1.25	1.40	—	2.1	2.1
Max Flow (LPM / GPM)	—	—	—	—	—
Max Pressure (Bar / PSI)	310 / 4500	310 / 4500	10 / 150	310 / 4500	310 / 4500
Max Temp (°C / °F)	60 / 140	60 / 140	60 / 140	150 / 300	150 / 300
Weight (kg)	.54	.60	.05	.18	.18
Box QTY	10	10	100	100	100
Rotate	—	—	—	—	—



AK9091



AB9100



AB9109



AK5001

Specification	AK9091	AB9100	AB9109	AK5001
Connection	3/8" MNPT × 3/8" MNPT	1/4" QC Plug	1/4" QC Plug	M22 M
Material	Brass	Tungsten	Tungsten	Plastic
Nozzle Orifice (mm)	2.1	—	—	—
Max Flow (LPM / GPM)	—	15 / 4.0	40 / 10.5	—
Max Pressure (Bar / PSI)	310 / 4500	310 / 4500	350 / 5075	70 / 1015
Max Temp (°C / °F)	150 / 300	150 / 300	150 / 300	60 / 140
Weight (kg)	.18	2.20	3.70	.46
Box QTY	100	1	1	10
Rotate	—	—	—	Yes

INLET FILTERS



AK5101



AK5005



AK5105G



AK5104G



AK5006

Specification	AK5101	AK5005	AK5105G	AK5104G	AK5006
Connection	3/4" Hose Barb	1" FNPT × 1" FNPT	G3/4" F × G3/4" F	G3/4" F × G3/4" M	GH3/4" F × 1/2" MNPT
Material	Plastic	Plastic	Plastic	Brass	Brass
Mesh Size	40	60	60	60	60
Max Pressure (Bar / PSI)	10 / 150	10 / 150	10 / 150	10 / 150	10 / 150
Max Temp (°C / °F)	60 / 140	60 / 140	60 / 140	60 / 140	60 / 140
Weight (kg)	.54	.60	.05	.18	.18
Box QTY	10	10	100	100	100

SWEEPER



SWEEPER



- ☐ **No Power Required**
Easy to operate
- ☐ **Foldable Handle**
For easy storage and transport
- ☐ **Manual Adjustment**
Manual height and side brush adjustments for a variety of cleaning tasks

S0949-L-RT

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	S0949-L-RT
Sweeping Width	mm	980
Working Efficiency	m²/h	3680
Main Brush Length	mm	490
Side Brush Diameter	mm	350

SWEeper



- One button Operation**
Integrates water spraying, sweeping and vacuuming
- Foldable Handle**
For easy storage and transport
- Tool free Adjustment**
Tool-free main and side brush adjustments for a variety of cleaning tasks

S1045-L-TD

APPLICATION



SPECIFICATIONS

PERFORMANCE	UNIT	S1045-L-TD
Sweeping Width	mm	1025
Working Efficiency	m²/h	5000
Main Brush Length	mm	445
Side Brush Diameter	mm	450
Dustbin Capacity	L	35
Water Tank Capacity	L	30
Cleaning Motor	W	200 + 180 + 65 × 2 + 40
Battery Pack	-	12V 70Ah

SWEeper



- Robust & Durable**
Robust and durable steel frame and rotational molding cover
- Easy Operation**
Simple and reliable mechanical switch panel, easy to operate
- Powerful Travel Motor**
Powerful travel motor with 20% climbing capacity
- Compact Size**
Suitable for working in limited space such as warehouse and factory
- Flexible Operation**
360° turn in place

S1353D-L-YS

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	S1353D-L-YS
Voltage	V	48
Sweeping Width	mm	1300
Working Efficiency	m²/h	9500
Climbing Capacity	%	20
Main Brush Length	mm	530
Side Brush Diameter	mm	500
Dustbin Capacity	L	80
Water Tank Capacity	L	30
Driving Motor	W	800
Cleaning Motor	W	700 + 90 × 2 + 200 + 500
Turning Radius	mm	0
Max Driving Speed	km/h	10
Max Working Speed	km/h	6
Battery Pack	-	12V 45Ah × 4
Battery Life	h	≤3

SWEeper



S1974DF-L-YS

- Robust & Durable**
Robust and durable steel frame and full-enclosed shell
- Easy Operation**
Simple and reliable mechanical switch panel, easy to operate
- Powerful Travel Motor**
Powerful travel motor with 25% climbing capacity
- Four Brush Design**
More thorough dust cleaning
- Flexible Operation**
360° turn in place

APPLICATION



SPECIFICATIONS

PERFORMANCE	UNIT	S1974DF-L-YS
Voltage	V	48
Sweeping Width	mm	1900
Working Efficiency	m²/h	14600
Climbing Capacity	%	25
Main Brush Length	mm	740
Side Brush Diameter	mm	500
Dustbin Capacity	L	220
Water Tank Capacity	L	200
Driving Motor	W	1500
Cleaning Motor	W	1000 + 150 × 4 + 200 + 500
Turning Radius	mm	0
Max Driving Speed	km/h	10
Max Working Speed	km/h	6
Battery Pack	-	12V 103Ah × 4
Battery Life	h	≤5


SWEeper



S2166D-L-YS

- Robust & Durable**
Robust and durable steel frame and semi-enclosed shell
- Easy Operation**
Simple and reliable mechanical switch panel, easy to operate
- Powerful Travel Motor**
Powerful travel motor with 20% climbing capacity
- Four Brush Design**
More thorough dust cleaning
- Flexible Operation**
360° turn in place

DETAILS

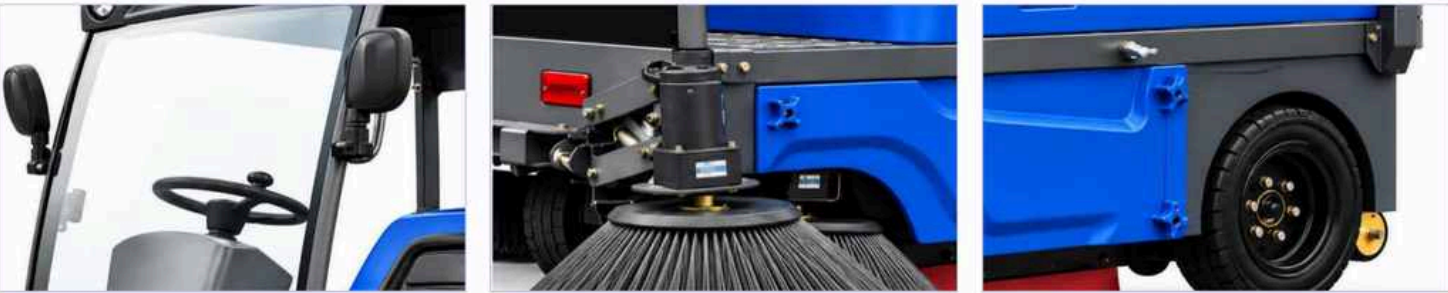

SPECIFICATIONS

PERFORMANCE	UNIT	S2166D-L-YS
Voltage	V	48
Sweeping Width	mm	1500~2100
Working Efficiency	m²/h	15600
Climbing Capacity	%	20
Main Brush Length	mm	660
Side Brush Diameter	mm	500
Dustbin Capacity	L	180
Water Tank Capacity	L	60
Driving Motor	W	1200
Cleaning Motor	W	1000 + 90 × 4 + 200 + 500
Turning Radius	mm	0
Max Driving Speed	km/h	10
Max Working Speed	km/h	6
Battery Pack	-	12V 80Ah × 4
Battery Life	h	≤4

SWEEPER



S2579DF-L-YS

- Robust & Durable**
Robust and durable steel frame and full-enclosed shell
- Easy Operation**
Simple and reliable mechanical switch panel, easy to operate
- Powerful Travel Motor**
Powerful travel motor with 30% climbing capacity
- Double Brush Design**
More thorough dust cleaning
- Flexible Operation**
360° turn in place

APPLICATION



SPECIFICATIONS

PERFORMANCE	UNIT	S2579DF-L-YS
Voltage	V	48
Sweeping Width	mm	1500~2450
Working Efficiency	m²/h	20000
Climbing Capacity	%	30
Main Brush Length	mm	790
Side Brush Diameter	mm	600
Dustbin Capacity	L	240
Water Tank Capacity	L	300
Driving Motor	W	1500
Cleaning Motor	W	1100 + 150 × 4 + 200 × 2 + 500 × 2
Turning Radius	mm	0
Max Driving Speed	km/h	10
Max Working Speed	km/h	6
Battery Pack	-	12V 200Ah × 8
Battery Life	h	≤8

FLOOR SCRUBBER



08

FLOOR SCRUBBER



X2834-L-KS



X3542-L-KS

PERFORMANCE	UNIT	X2834-L-KS	X3542-L-KS
Voltage	V	24	24
Cleaning Width	mm	280	350
Squeegee Width	mm	340	420
Cleaning Efficiency	m²/h	800	1000
Brush Motor	W	200	400
Brush Speed	RPM	160	180
Brush Pressure	kg	22	22
Suction Motor	W	120	400
Suction Vacuum	mbar	160	160
Solution Tank Capacity	L	6	13
Recovery Tank Capacity	L	9	15
Noise Level	dB	≤70	≤70
Battery Pack	-	12V 12Ah × 1	12V 32Ah × 2
Battery Life	h	≤1.5	≤1.5

08

FLOOR SCRUBBER



X5252-L-KS

DETAILS



- 360° Flexible Steering**
Gravity assisted steering design offers 360° flexibility while requiring minimal storage space
- Dual Counter-rotating Brushes**
Enhance cleaning power, ensuring complete water recovery and instantly dry floors
- Extended Runtime**
Equipped with a 12Ah high capacity lithium battery
- Intermittent Water Supply**
Intermittent water supply function allows one tank of water to clean twice the area

SPECIFICATIONS

PERFORMANCE	UNIT	X5252-L-KS
Voltage	V	24
Cleaning Width	mm	520
Squeegee Width	mm	590
Cleaning Efficiency	m²/h	1200
Brush Motor	W	160 × 2
Brush Speed	RPM	350
Brush Pressure	kg	25
Suction Motor	W	120
Suction Vacuum	mbar	160
Solution Tank Capacity	L	6
Recovery Tank Capacity	L	9
Noise Level	dB	≤70
Battery Pack	-	12V 12Ah × 1
Battery Life	h	≤2

08

FLOOR SCRUBBER



X5378-L-ZY



X5682-L-KS

Specification	X5378-L-ZY	X5682-L-KS
Voltage (V)	24	24
Cleaning Width (mm)	530	560
Squeegee Width (mm)	780	820
Cleaning Efficiency (m²/h)	2100	2300
Brush Motor (W)	550	500
Brush Speed (RPM)	160	155
Brush Pressure (kg)	25	28
Suction Motor (W)	500	500
Suction Vacuum (mbar)	160	180
Solution Tank Capacity (L)	50	50
Recovery Tank Capacity (L)	56	55
Noise Level (dB)	≤68	≤68
Battery Pack	12V 100Ah × 2	12V 100Ah × 2
Battery Life (h)	≤4	≤4

08

FLOOR SCRUBBER



X5682D-L-KS

- Long Service Life**
Hot mixing water tank with long service life
- Machine Protection**
Integrated circuit controller fully protects the machine
- ECO Energy-saving Mode**
Increases battery life; has only 58dB noise
- Compact Size**
Suitable for narrow space, easy access to elevator
- Arch Squeegee**
Aluminum die-casting arch squeegee to prevent sewage leakage

APPLICATION



SPECIFICATIONS

PERFORMANCE	UNIT	X5682D-L-KS
Voltage	V	24
Cleaning Width	mm	560
Squeegee Width	mm	820
Cleaning Efficiency	m²/h	3500
Rear Drive Motor	W	500
Brush Motor	W	500
Brush Speed	RPM	220
Brush Pressure	kg	28
Suction Motor	W	500
Suction Vacuum	mbar	180
Solution Tank Capacity	L	70
Recovery Tank Capacity	L	80
Noise Level	dB	≤60
Battery Pack	-	12V 100Ah × 2
Battery Life	h	≤4

FLOOR SCRUBBER



X86105D-L-KS

- Long Service Life**
Hot mixing water tank with long service life
- Machine Protection**
Integrated circuit controller fully protects the machine
- ECO Energy-saving Mode**
Increases battery life; has only 58dB noise
- Strong Climbing Ability**
High power rear drive motor provides strong climbing ability
- Automatic Lifting**
Dual rod push motor automatically lifts brush and squeegee

APPLICATION



SPECIFICATIONS

PERFORMANCE	UNIT	X86105D-L-KS
Voltage	V	24
Cleaning Width	mm	860
Squeegee Width	mm	1050
Cleaning Efficiency	m²/h	5500
Rear Drive Motor	W	800
Brush Motor	W	500 × 2
Brush Speed	RPM	180
Brush Pressure	kg	28
Suction Motor	W	600
Suction Vacuum	mbar	180
Solution Tank Capacity	L	120
Recovery Tank Capacity	L	140
Noise Level	dB	≤68
Battery Pack	-	6V 200Ah × 4
Battery Life	h	≤5

VACUUM CLEANER



VACUUM CLEANER



- 3 in 1**
Dry, Wet & Circulating Filtration
- Reliable Motor**
Offers powerful suction
- Anti-aging & Corrosion Resistant**
Plastic bucket and base
- 4 Universal Castors**
At the bottom can easily move the machine

V2012-PL-SP

DETAILS



SPECIFICATIONS

PERFORMANCE	UNIT	V2012-PL-SP
Voltage	V	220~230
Power	W	1200
Capacity	L	20
Suction Power	KPa	16
Noise	dB	≤ 73
Cable Length	m	4.5
Hose Length	m	1.5
Filter	-	Cloth

VACUUM CLEANER



V4012S-SL-SP



V8036-SL-SP

Specification	V4012S-SL-SP	V8036-SL-SP
Voltage (v)	220~230	220~230
Power (W)	1200	3600
Capacity (L)	40	80
Suction Power (kPa)	≥18	≥19
Noise (dB)	≤80	≤85
Cable Length (m)	4.5	4.5
Hose Length (m)	1.5	1.5
Filter	Cloth	Cloth

AIR MOVER



2V2485

- ☐ **Three-speed Airflow**
2700 / 2400 / 2200 m³/h airflow settings.
- ☐ **600 W Motor**
220–240 V / 50 Hz power supply.
- ☐ **Portable Design**
Integrated carry handle and trolley wheels.
- ☐ **Drying Applications**
Air circulation for drying floors and surfaces.

SPECIFICATIONS

PERFORMANCE	UNIT	2V2485
Power	W	600
Voltage	V	220–240
Frequency	Hz	50
Air Volume	m³/h	2700 / 2400 / 2200
Maximum Air Speed	m/s	21 / 19 / 18
Rotating Speed	RPM	1350 / 1250 / 1100
Applicable Area	m²	90
Noise	dB	70
Net Weight	kg	11
Gross Weight	kg	12.2

